



### Characteristics


External dimensions : 600 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 600x724x650  
 Interior dimensions : 530x656x430  
 Front without any visible screw  
 Double skin door

### Options :

worktop cut out with removable salting tank (X080602)  
 s/s steel trim bardiam 38 - linear meter (X081001)  
 table for trim bar - 500mm (X081002)  
 lateral swing doorfor technical cupboard (X081111)  
 neutral unit cut outin technical cupboard (X081112)  
 connecting plate for foot removal (X087004)  
 electric outlet on front panel (X330311)  
 goose neck watertaprotating (X902001)  
 cold&hot water supply on water column 500mm (X902002)

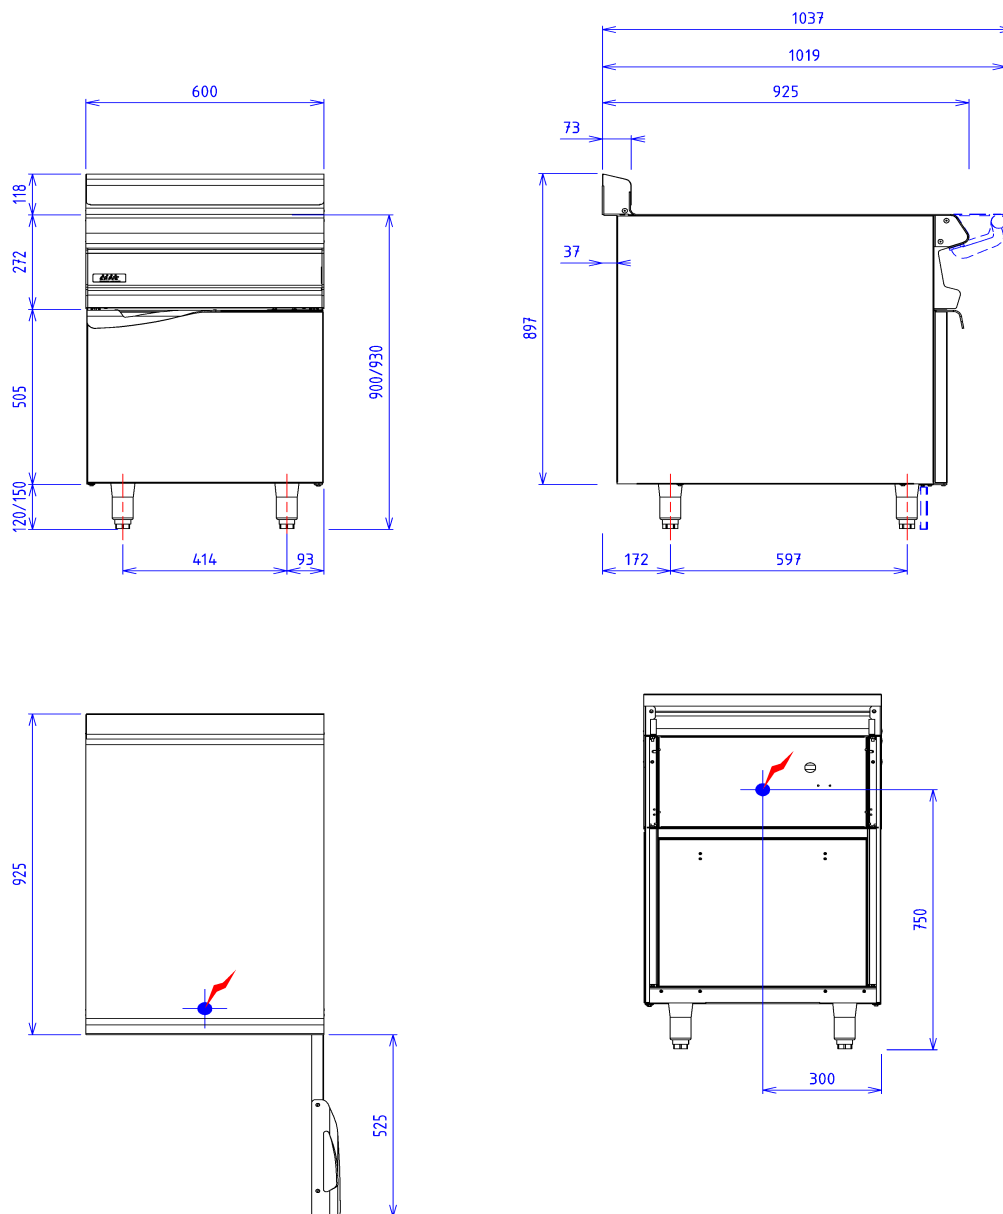

## ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335