

Characteristics

External dimensions : 800 X 925 X 270
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


4 open burners
 Remotely controlled flame burners from: 4x7kW
 BURNERS WITH STAINLESS STEEL HOUSING
 Burner griddles in stainless steel, dimensions : 400x600
 Stamped tank & cleaning tray
 Security by thermocouple with pilotlight
 secured and protected commands

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

electric ignition gas burner(first gas burner) (X901501)
 electric ignition gas burnereach other gas burner (X901502)

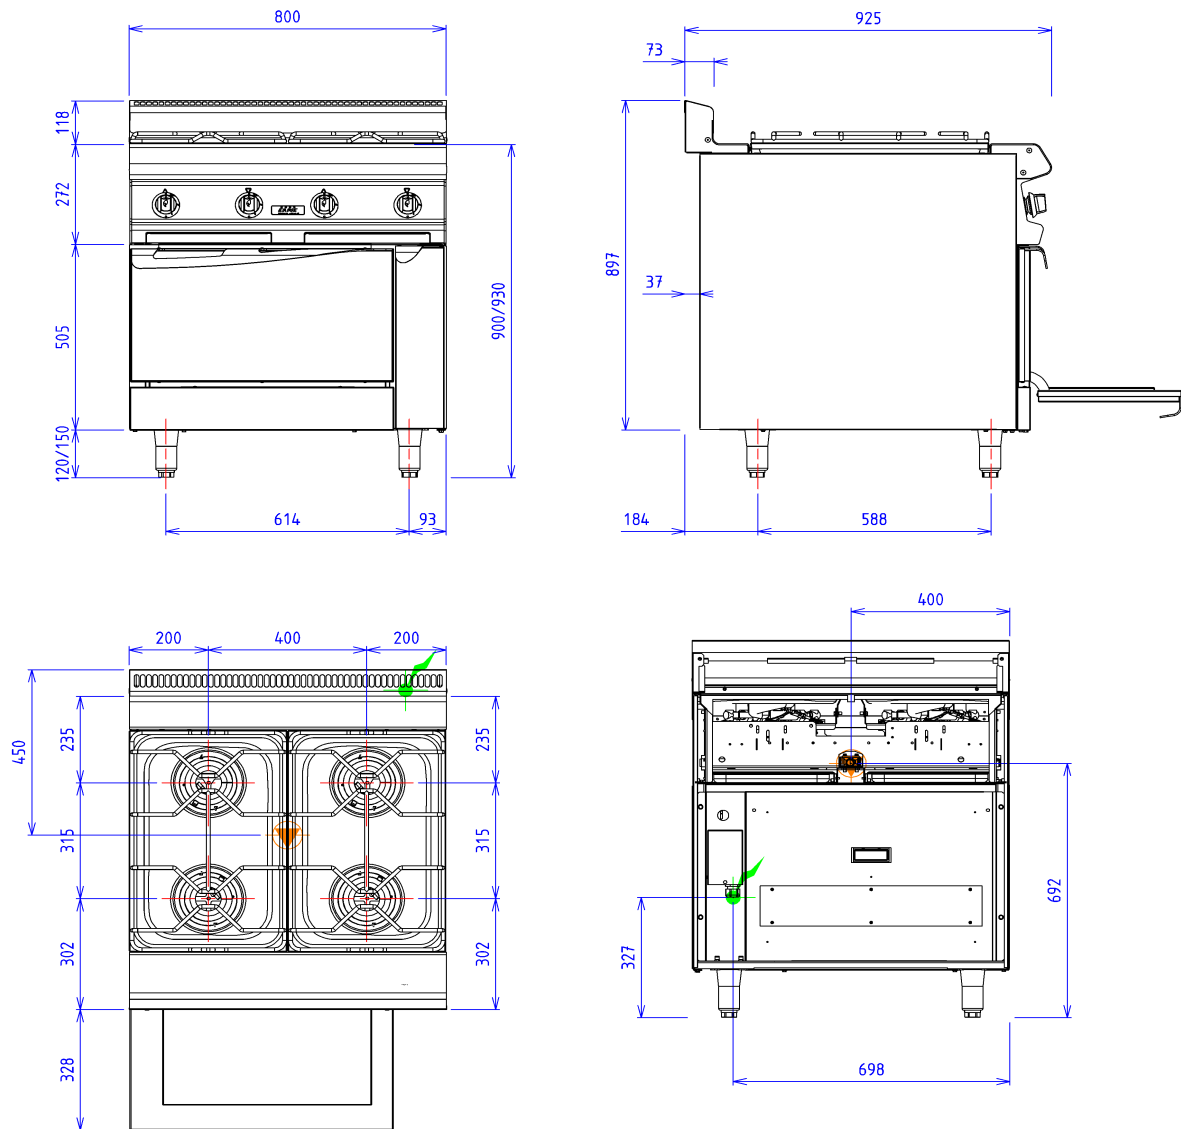

GAS



Gas power : 28kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 5.10kW

Elec Réservation : - Elec fitting : 400V THREE phases + NEUTRAL

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335