



Characteristics

External dimensions : 400 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

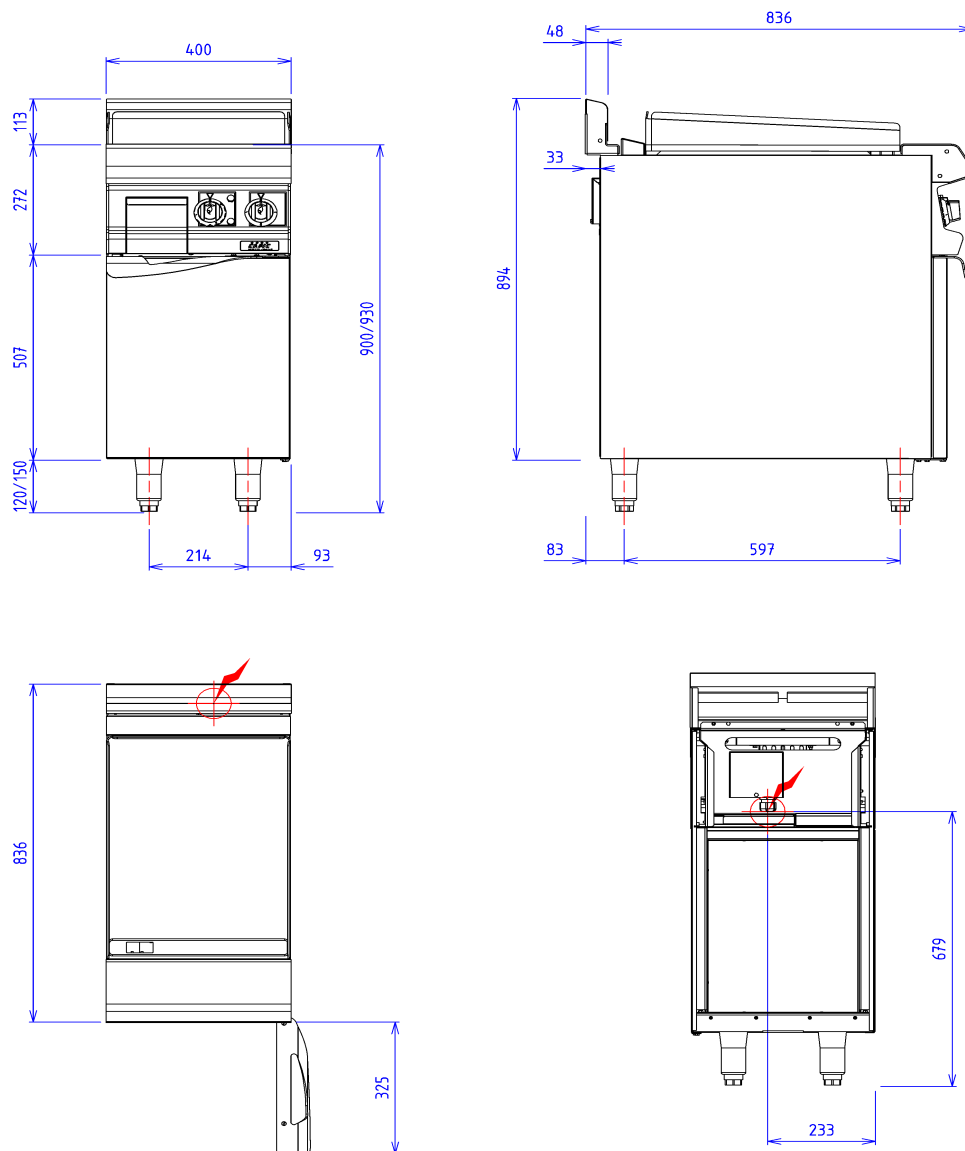
special stainless steel plate : 400x550
 Power : 5 kW
 Heating by reinforced stainless steel resistances
 Control by thermostat
 Welded Splash gard
 Drawer to collect greases

Options :

1/2 ribbed griddle 400x500 stainless steel 400 or 500 (X050972)
 ribbed griddle for stainless steel plate 400 (X050973)
 mirror polishing chrome aspect (X050974)
 s/s steel trim bardiam 38 - linear meter (X081001)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 400x724x650
 Interior dimensions : 330x656x430
 Front without any visible screw
 Double skin door

**ELECTRIC**

Electric power : 5.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases

Electrical devices standard to the norm EN 60-335