




The reference in catering equipment

GRANDE CUISINE KETTLE 150L ELEC.

DIRECT HEAT - HW/CW FEED

## **GRANDE CUISINE 1000**

### **FRONT 1000**

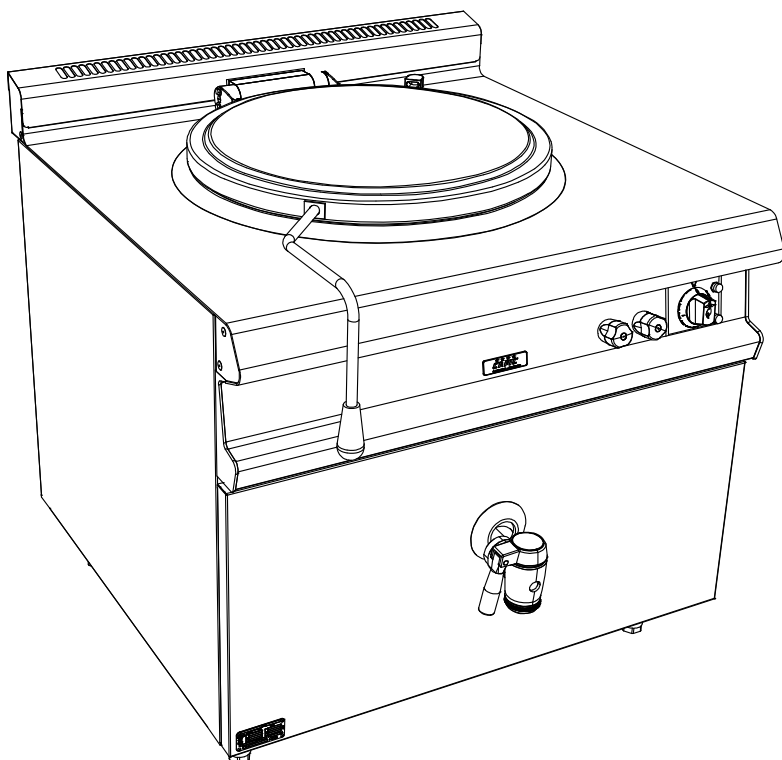

#### **Descriptions :**

External dimensions : 1000x1000x900/930  
Top in brushed 18.10 stainless steel  
Top thickness 3 mm  
body 1 mm in brushed stainless steel  
Structure 2 mm in stainless steel  
composite feet de 150 height adjustable  
folded front edge radius 20 mm  
Back edge forming a chimney cover  
Front without any visible screw

#### **Top :**


1 mm stainless steel double lid  
equipped with echtermann hinge  
Cuve in stainless steel 18.10 welded on the top  
2mm thickness for the ferrule and 3mm for the bottom  
Dimensions (ØxP) : 603x550  
net capacity : 150 l.  
Power: 12 kW  
Lig handle with insulated end  
HW/CW feeding by fixed tap  
controlled from front by 1/4 turn tap  
with ceramic components  
Drain Valve 40/49 with retractable handle  
Removable strainer with level indication  
Heating by reinforced stainless steel resistances  
Leaned against the bottom of the tank  
Sequential energy dispenser controller  
Lighting indicator

#### **Base unit :**

#### **Options :**

Offset drainage pipe (X901802)  
316L stainless steel tank (X904001)  
Removable perforated double bottom (X294001)

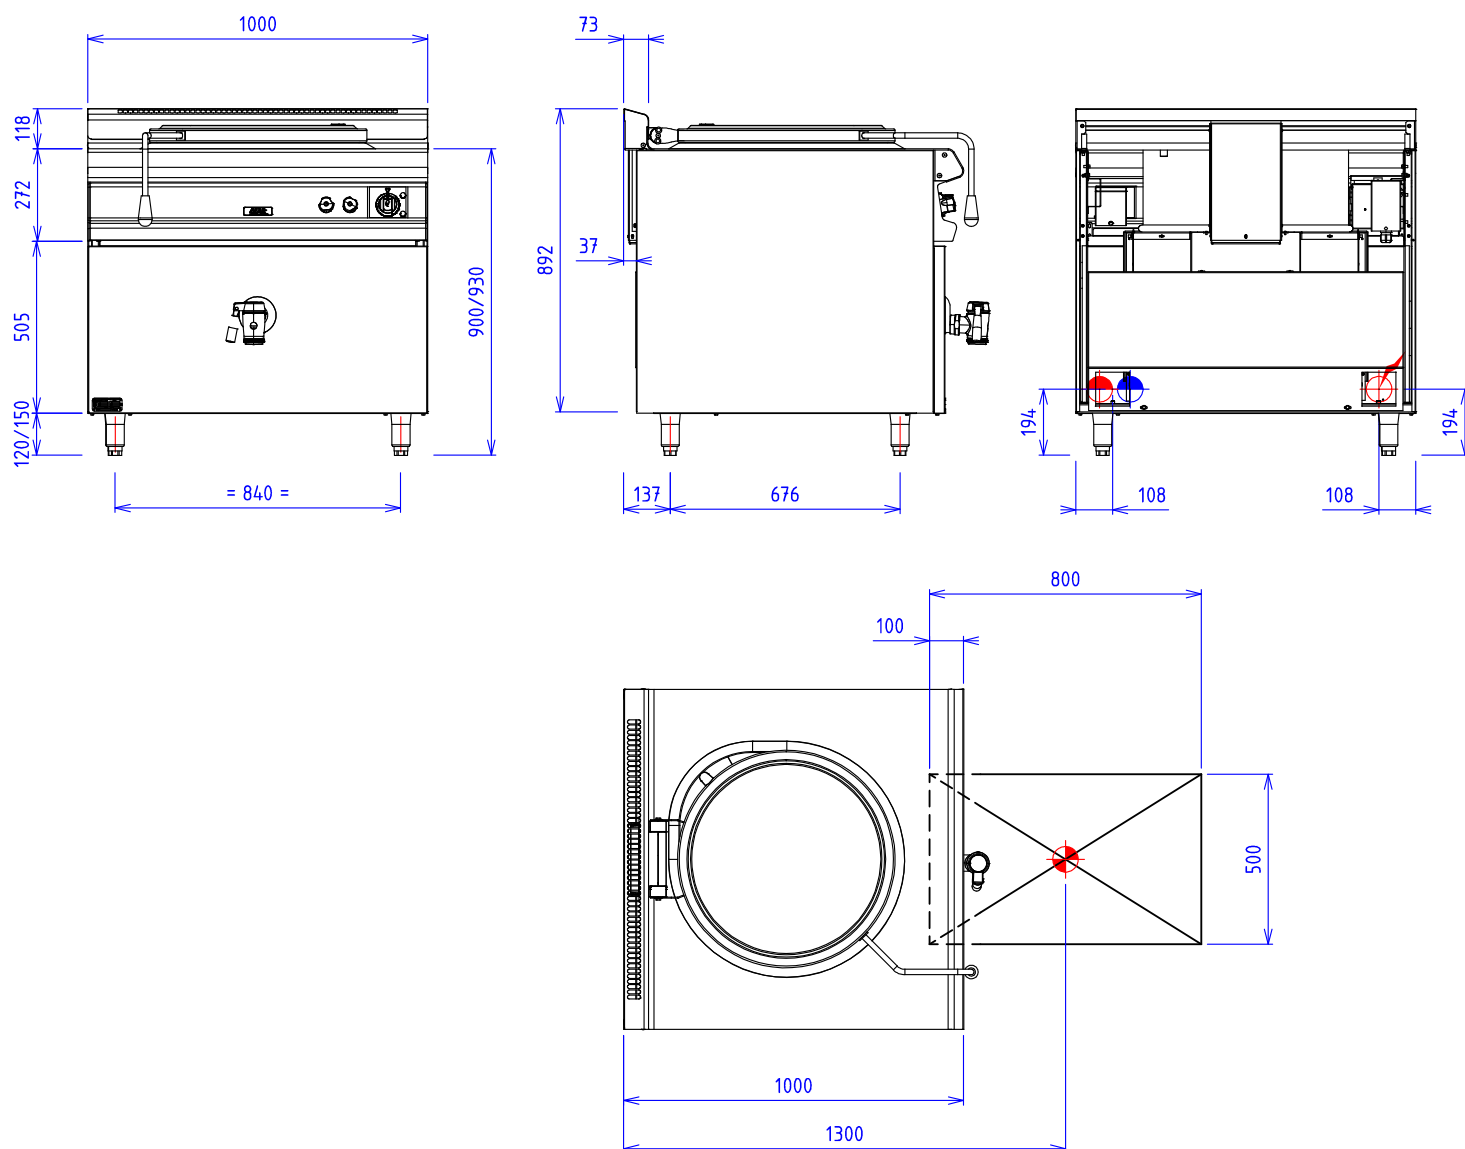

## GRANDE CUISINE KETTLE 150L ELEC. DIRECT HEAT - HW/CW FEED



### **GAS :**

**ELEC :**  Electric power : 12 kW Elec reservation : internal wiring Elec fitting : 400Vx3+T

Electrical devices standard to the norm EN 60-335

**WATER :**  Hot water fitting: 15/21 socket  
 Cold water fitting: 15/21 socket